Technisches Datenblatt

Technical data sheet

Starke Verbindung
Kluge Technik
Strong contacts
Clever technology

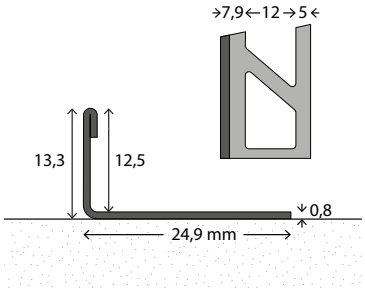




## Abschlussprofil
## Nr. 725, 12,5 mm

- Edelstahl, 1.4301 (V2A).
- Für Beläge 12,5 mm.
- Loch-Stanzung.

Werkstoff: 1.4301 (DIN EN 10088-2)
Nicht genormte Bezeichnung: Edelstahl rostfrei, V2A

**Geeignet für:** Fertigparkett, Keramische Fliese / Steinböden
**Montageart:** Kleben

**L-Abschlussprofile werden im Klebebett verlegt und schützen so die Fliesenkante.**
**Sie schaffen saubere Abschlüsse oder Übergänge zwischen Fliesen und verklebten Hartbodenbelägen oder Teppichboden.**
**Je nach Profilhöhe sind L-Abschlussprofile auch für Designböden, LVT, Laminat oder Parkett geeignet.**

## Border section
## no. 725, 12.5 mm

- Stainless steel, 1.4301 (V2A).
- For floor coverings 12.5 mm.
- Punched holes.

Material: 1.4301 (DIN EN 10088-2)
Non-standardised description: Stainless steel, V2A

**Suitable for:** Finished parquet, Ceramic tiles / Stone floorings
**Installation:** gluing

**L-sections are laid within the tile cement, protecting the edge of the tile.**
**They create clean finishings or transitions between tiles and bonded hard floor coverings or even carpets.**
**Depending on the profile height, L-profile profiles are also suitable for design floors, LVT, laminate or parquet.**