
Technisches Datenblatt

Technical data sheet

Starke Verbindung
Kluge Technik
Strong contacts
Clever technology



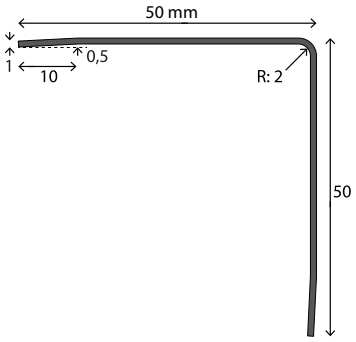

Eckschutzwinkel
Nr. 285, 50 x 50 mm

- Edelstahl, 1.4016 (V2A).
- Dreifach gekantet.
- Ungelocht.

Werkstoff: 1.4016 (DIN EN 10088-2)
Nicht genormte Bezeichnung: Edelstahl rostfrei, V2A
Werkstoffzustand: 2G geschliffen, Korn 180 gem. DIN EN 10088-2

Montageart: Kleben

Eckschutzwinkel schaffen im Objektbereich effektiven Aufprallschutz an hervorstehenden Raumecken und veredeln diese zudem optisch. Sie werden nach Abschluss der Raumgestaltung montiert und bieten effektiven Schutz vor Beschädigungen, insbesondere durch mobile Elemente wie Betten oder Transportwagen.

Corner protective square
no. 285, 50 x 50 mm

- Stainless steel, 1.4016 (V2A).
- Folded three times.
- Without screw holes.

Material: 1.4016 (DIN EN 10088-2)
Non-standardised description: Stainless steel, V2A
Material condition: 2G ground, grain 180 ref. to DIN EN 10088-2

Installation: gluing

Corner protective angles create an effective impact protection on prominent room corners. They also enhance them optically. They are installed after completion of the interior design and protect against damage, in particular by mobile elements such as mobile beds or transport trolleys.

Carl Prinz GmbH & Co. KG
von-Monschaw-Str. 5, D-47574 Goch
www.carlprinz.de

Mit Erscheinen dieses Dokuments verlieren alle Vorgängerversionen ihre Gültigkeit.
With publication of this document all former versions are invalid.